




SOLAR PANEL

MONOCRYSTALLINE

200W MAXX

64 cells
Monocrystalline


200W
Maximum power

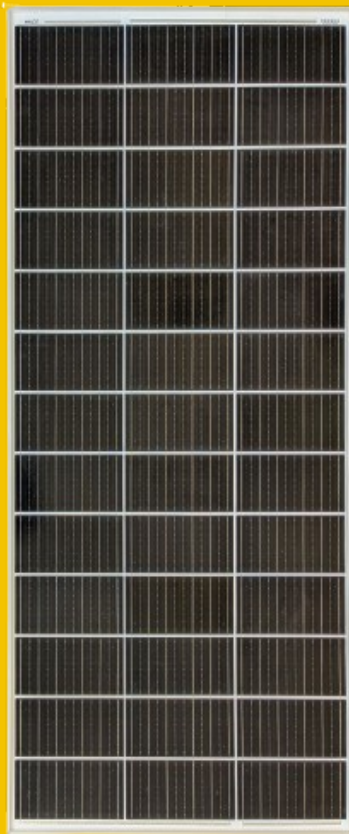


TECHNICAL DATA

| INDEX | P0187_SF |
|---------------------------------|-------------------------------|
| MODEL | 200W Maxx |
| Peak Power (Pmax) [W] | 200 |
| Maximum Power Voltage (Vmp) [V] | 22,48 |
| Maximum Power Current (Imp) [A] | 8,90 |
| Open Circuit Voltage (Voc) [V] | 26,29 |
| Short Circuit Current (Isc) [A] | 9,37 |
| Maximum System Voltage | 1000VDC(IEC) |
| Power Tolerance | 0~+3W |
| Cell Type | Monocrystalline |
| Dimensions [mm] | 1485x668x30 |
| Weight [kg] | 10,5 |
| Output cables | 90cm 2x4.0mm ² MC4 |
| Warranty | 5 years |
| Bus Bar | 12BB |
| Junction box | IP68 |
| Front Glass (tempered glass) | 3,2mm |
| Frame | silver |

TECHNICAL DRAWING (mm)

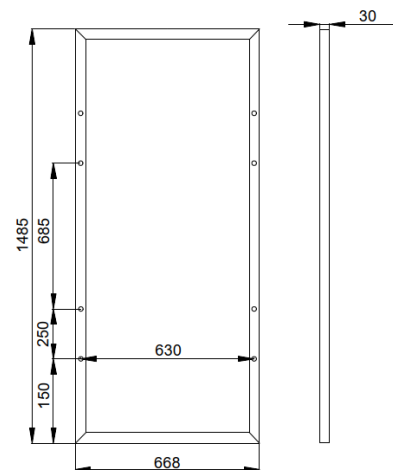

CHARACTERISTIC

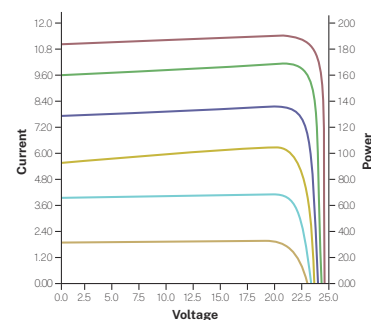

ISO9001
ISO14001
OHSAS18001
IEC TS 62941



The electrical parameters listed on the product label may differ slightly from the specifications.



4Sun sp. z o.o. sp.k.
Annopol 4, 03-236 Warszawa
tel: (22) 114 98 05, email: biuro@4sun.eu

www.4sun.eu